
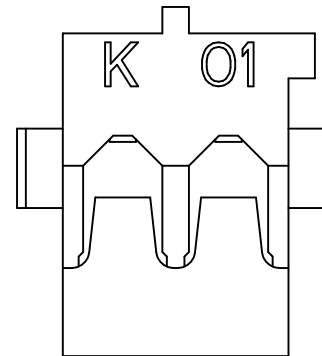
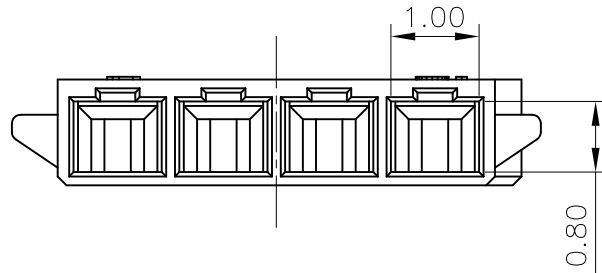



RoHS  
COMPLIANT

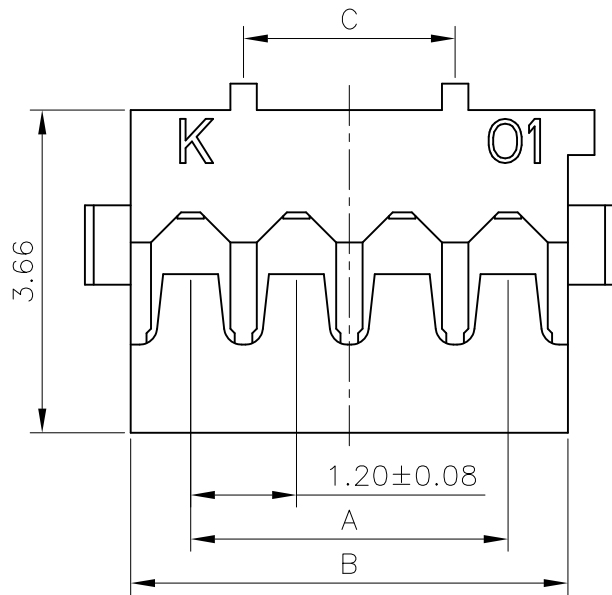

2P View

◆ SPECIFICATIONS

- Current rating: 1.5A AC, DC
- Voltage rating: 50V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 46 UL94V-0  
Suitable: 1201 series Crimp Terminal

Ordering Code:

H12010 \*\*\* 07 02A

102=2P

103=3P

07:PA46 Natural  
23:PA46 Grey

PIN.	Dimension		
	A	B	C
2P	1.20	2.60	/
3P	2.40	3.80	1.20
4P	3.60	5.00	2.40
5P	4.80	6.20	3.60
6P	6.00	7.40	4.80
7P	7.20	8.60	6.00

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A3	1	Uniformly arrange the drawings	Shen	2021.08.30	X.X ±0.30	ACH1.2 Housing Unilateral ear buckle	Shen 2021.08.30			A3	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.: H12010****02A DRAWING NO.: 1201H02-A-S
A2	2	Change the part number and frame format	TLX	2020.03.28	X.XX ±0.20						
	3				X.XXX ±0.10						
	4				Angle ±2°	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION		