
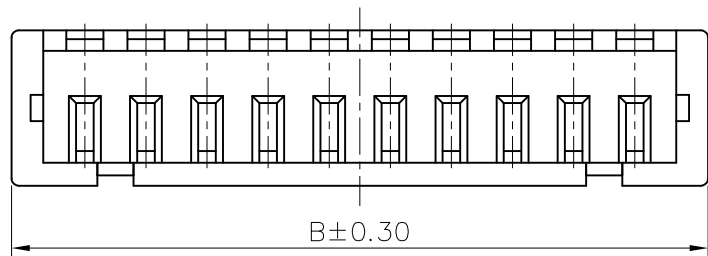
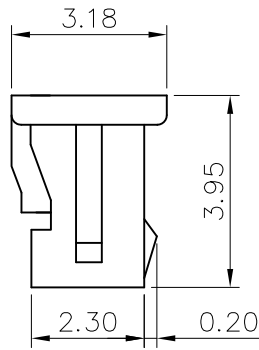


RoHS
COMPLIANT

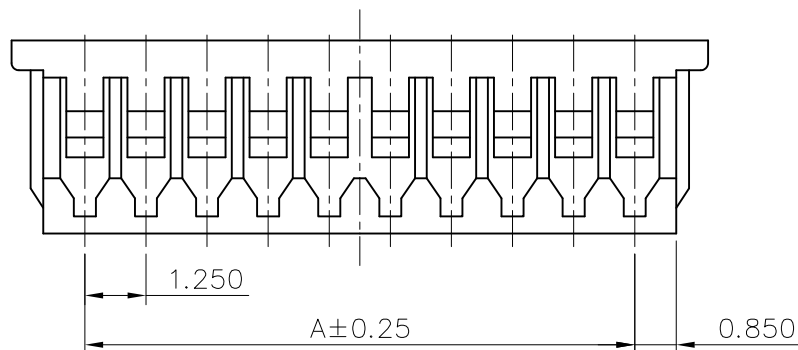

◆SPECIFICATIONS

- Current rating: 1A AC, DC
 - Voltage rating: 125V AC,DC
 - Temperature range: -40°C ~ +105°C
 - Insulation resistance: 100MΩ Min.
 - Withstanding voltage: 250V AC/ minute.
 - Contact resistance: 20mΩ Max.
- Material:Nylon 66 UL94-V0
Suitable:KR1250 series Terminal
Mates with:KR1250W* series Wafer And
KR1251 Housing
Q'ty:1,000PCS

Ordering Code:

H125001**0100A

- 102:2P
- 103:3P
-
- 00:Halogen free
- 01:Conventional products
- 01:PA66 UL94 V-0 white
- 02:PA66 UL94 V-0 black
- 22:PA66 UL94 V-0 beige
- 24:PBT white
- 36:PA66+15% Glass fiber

Circuits	A	B	Circuits	A	B
2	1.25	4.25	10	11.25	14.25
3	2.50	5.50	11	12.50	15.50
4	3.75	6.75	12	13.75	16.75
5	5.00	8.00	13	15.00	18.00
6	6.25	9.25	14	16.25	19.25
7	7.50	10.50	15	17.50	20.50
8	8.75	11.75	16	18.75	21.75
9	10.00	13.00			

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A3	Uniformly arrange the drawings	Shen	2021.08.31	X.X ±0.30	MX1.25 Housing	Shen 2021.08.31			A3	1250H101-A-S
A2	Change the part number and frame format	TLX	2020.04.08	X.XX ±0.20						
				X.XXX ±0.10						
				Angle ±2°	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION		

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:H125001****0*A

REV.:A3 DRAWING NO.:1250H101-A-S