
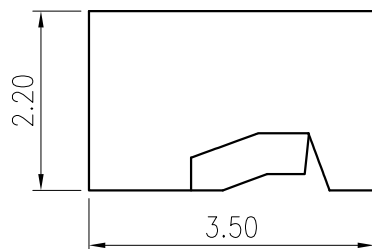




RoHS
COMPLIANT

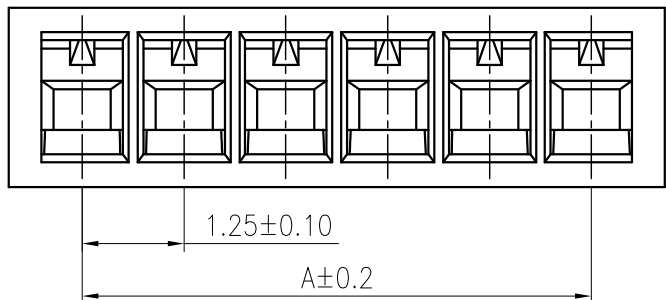

◆ SPECIFICATIONS

Current rating: 1A AC, DC
Voltage rating: 125V AC, DC
Temperature range: -40°C ~ +105°C
Insulation resistance: 100MΩ/ min.
Withstanding voltage: 250V AC/ minute.
Contact resistance: 20m Ω/ max.

Material: Nylon 66 UL94 V-0
Suitable: 1252 series Terminal

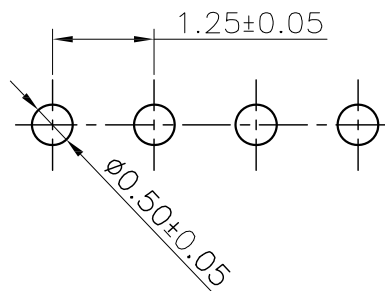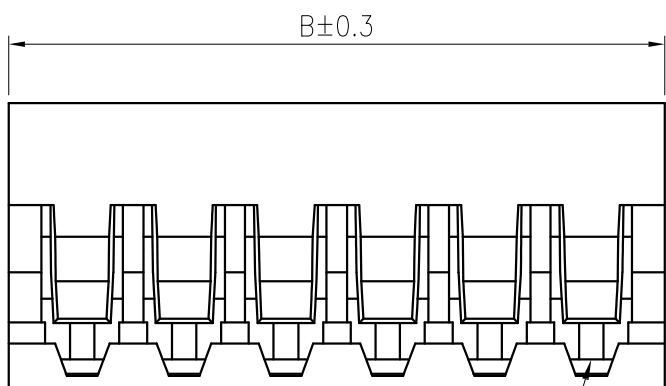

Recommended P.C.Board Layout
Total Tolerance: ±0.05mm

Part No	A	B
H125201020101A	1.25	3.00
H125201030101A	2.50	4.25
H125201040101A	3.75	5.50
H125201050101A	5.00	6.75
H125201060101A	6.25	8.00
H125201070101A	7.50	9.25
H125201080101A	8.75	10.50
H125201090101A	10.00	11.75
H125201100101A	11.25	13.00
H125201110101A	12.50	14.25
H125201120101A	13.75	15.50
H125201130101A	15.00	16.75
H125201140101A	16.25	18.00
H125201150101A	17.50	19.25
H125201160101A	18.75	20.50

Circuit 1

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A3	1	Uniformly arrange the drawings	Shen	2021.08.30	X.X ±0.30	MX1.25 Base plate Housing	Shen 2021.08.30			A3	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.: H125201**0101A DRAWING NO.: 1252H101-A-S
A2	2	Change the part number and frame format	TLX	2020.03.20	X.XX ±0.20						
	3				X.XXX ±0.10						
	4				Angle ±3°	UNIT:mm	SCALE: 1/1	SHEET: 1/1	PROJECTION		