
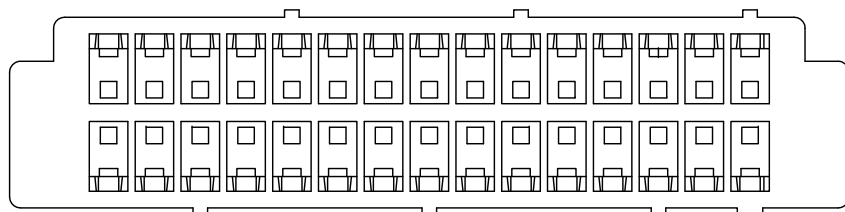

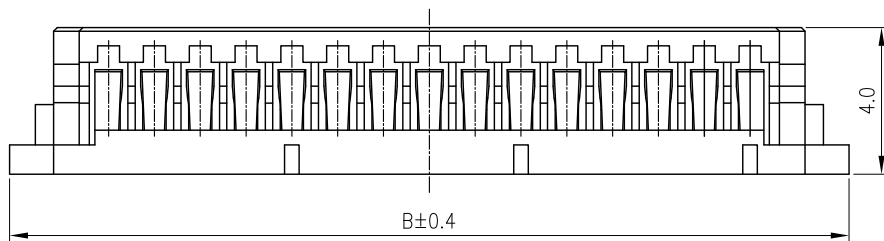


**RoHS**  
COMPLIANT

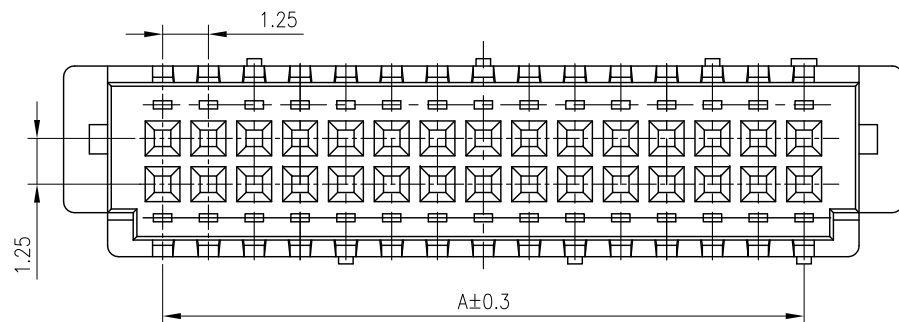

**SPECIFICATIONS**

1. Current rating: 1A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30m Ω Max.

Material: PA66 UL 94V-0  
Suitable KR1256 series terminal  
Mate with KR1256 series wafer

Ordering Code:

H12560 \*\*\* 19 01B

No. of Circuits  
205:2\*5,220:2\*20

Insulator Material  
19:PA66 Grey V0

Circuits	Dimensions	
	A	B
2*5	5.00	10.40
2*10	11.25	16.65
2*15	17.50	22.90
2*20	23.75	29.15

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
	1	Uniformly arrange the drawings	Shen	2021.08.31	X.X ±0.30	DF13 Two rows Housing	Shen 2021.08.31			A3	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.:H12560***1901B DRAWING NO.:1256H201-B-S
	2	Change the part number and frame format	LJT	2020.04.01	X.XX ±0.20						
	3				X.XXX ±0.10						
	4				Angle ±2°						
	5					UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION		