
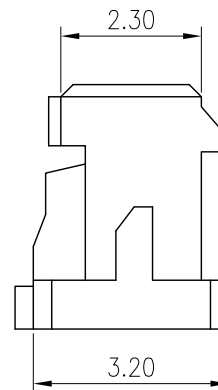
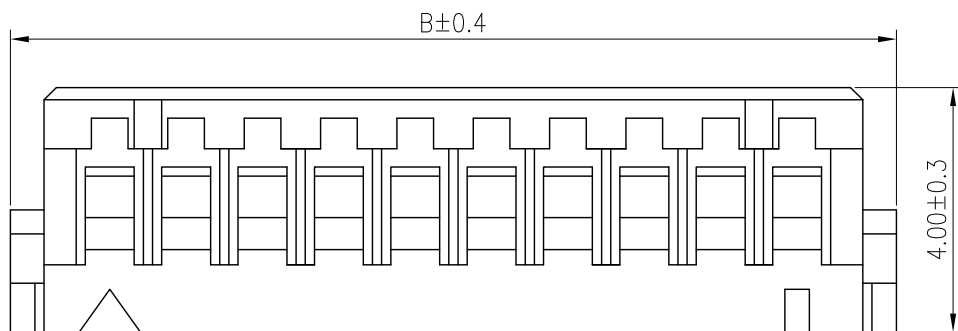


**RoHS**  
COMPLIANT

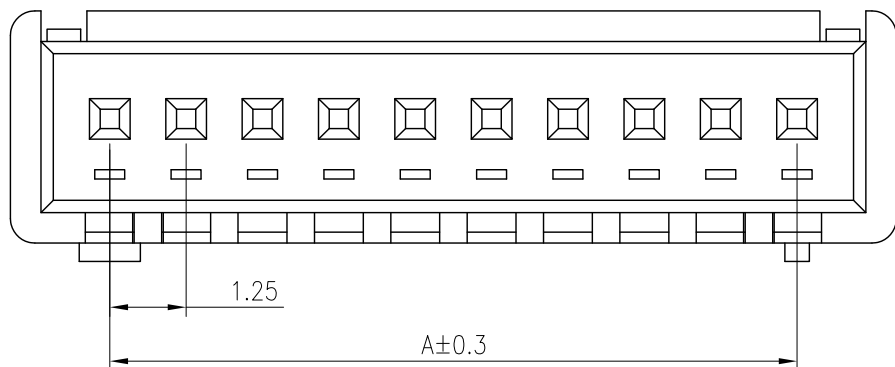

**SPECIFICATIONS**

1. Current rating: 1A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 100MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30m Ω Max.

Material: PA66 UL 94V-0  
Suitable KR1256 series terminal  
Mate with KR1256 series wafer

Ordering Code:

H12560 \*\*\* 19 01A

No. of Circuits  
102:2,115:15

Insulator Material  
19:PA66 Grey V0

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	1.25	4.15	11	12.50	15.40
3	2.50	5.40	12	13.75	16.65
4	3.75	6.65	13	15.00	17.90
5	5.00	7.90	14	16.25	19.15
6	6.25	9.15	15	17.50	20.40
7	7.50	10.40			
8	8.75	11.65			
9	10.00	12.90			
10	11.25	14.15			

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
	1	Uniformly arrange the drawings	Shen	2021.08.31	X.X ±0.30	DF13 Housing A Type	<i>Liujiqian 2020.04.01</i>				KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.: H12560***1901A REV.: A3 DRAWING NO.: 1256H101-A-S
	2	Change the part number and frame format	LJT	2020.04.01	X.XX ±0.20						
	3				X.XXX ±0.10						
	4				Angle ±2°	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION		