
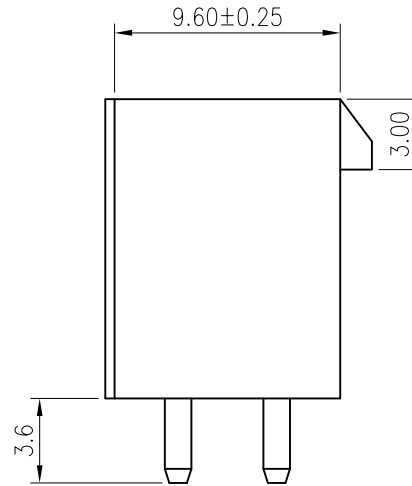
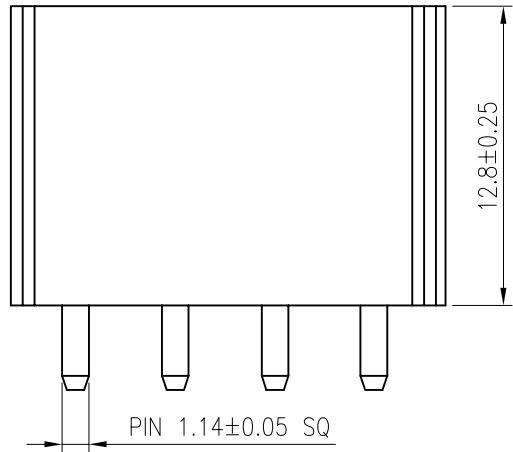
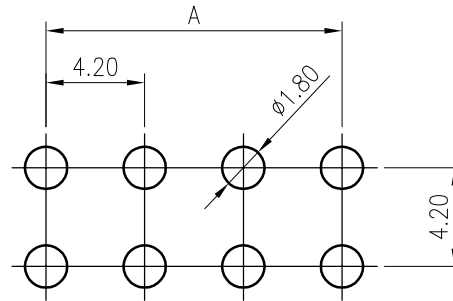


RoHS
COMPLIANT

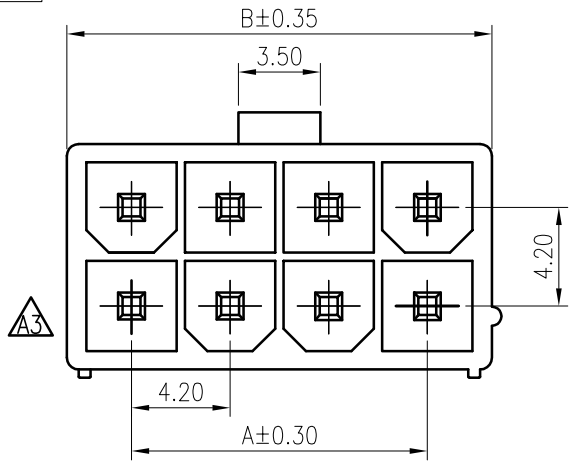

SPECIFICATIONS

1. Current rating: 9A(2P AWG#16) AC, DC
2. Voltage rating: 600V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10mΩ/ max.

Material:

Insulator: Nylon 66 UL 94V-2

Contact: Brass

Plating: Tin plated over Nickel

Mate with KR4200 series double row male housing

Ordering Code:

C4200VD *** 16 T0101PC

No. of Circuits
207: 2*7, 208: 2*8

Insulator Material
16: PA66 Transparent V2

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2x1	/	5.40	2x7	25.20	30.60
2x2	4.20	9.60	2x8	29.40	34.80
2x3	8.40	13.80	2x9	33.60	39.00
2x4	12.60	18.00	2x10	37.80	43.20
2x5	16.80	22.20	2x11	42.00	47.40
2x6	21.00	26.40	2x12	46.20	51.60

TOLERANCE

X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:
MX4.2 DIP 180°
Wafer double row
Solid needle without
post

DRAWN: Liujiangtian 2020.5.22

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO. : C4200VD***16T0101PC

MARK REVISION DESCRIPTION SIGNATURE DATE UNIT: mm SCALE: N/A SHEET: 1/1 PROJECTION REV. : A4 DRAWING NO. : 4200WD201-C-S

1 2 3 4 5 6 7 8 9